

FLOWTITE PRODUCTS

GREASE INTERCEPTOR

NOTE: CUSTOMER SUPPLIED
"ASTM C-1644" APPROVED
FLEXIBLE PIPING COUPLING
REQUIRED ON TANGENTIALLY
MTD. NOZZLES, & PIPES




SHELL CODES: 1-E6S08SD, 1-E6SECS



THIS IS AN IAPMO APPROVED TANK
THE ONLY CHANGE ALLOWED TO
THIS TANK IS TO INCREASE THE
INLET AND OUTLET PIPE DIAMETER.
MFG. PER. PE-C22.85

CAPACITIES:

LIQUID OPERATING CAPACITY = 2323 GALS
FREE SURFACE AREA OF LIQUID = 55 SQ/FT
GREASE/FOG STORAGE = 1042 GALS/7919 LBS

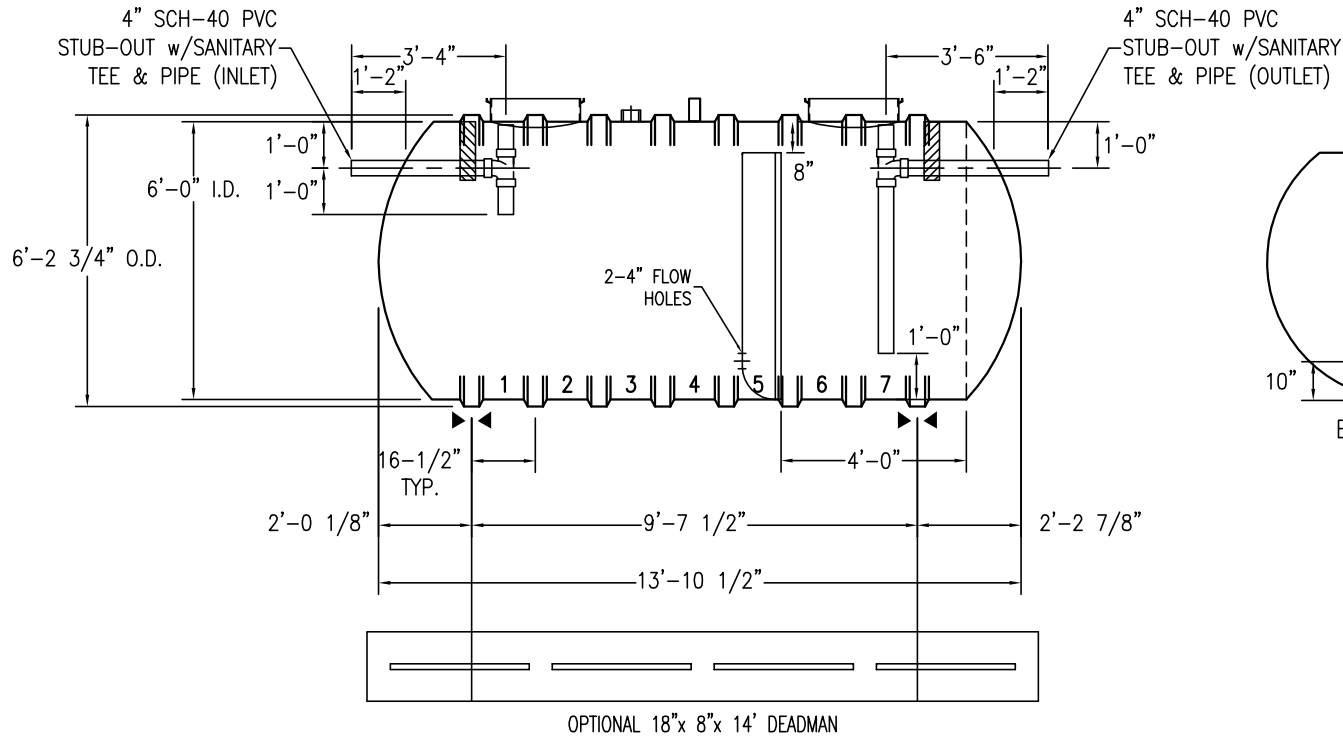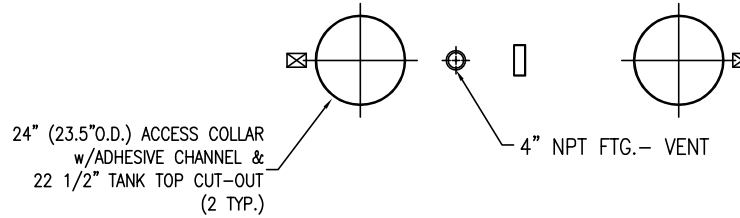

NOTES:

- ☒ HOLD DOWN STRAP CLIP
- ▶◀ HOLD DOWN STRAP LOCATION
- TYPE "13" LIFT LUG - SD
- TYPE "13" LIFT LUG - HD

7/2009

SWT D6 (6') 2300 2B-IG		DATE:	1/1/2014
IAPMO GREASE INTERCEPTOR		DRAWN BY:	R.MOEN
CONTAINMENT SOLUTIONS	CAPACITY:	REVISION:	
	WEIGHT: DRY/WET	DWG NUMBER:	623CSW-IG
	2,689		
	1450		