


STANDARD DIMENSIONS(SECONDARY TANK)				
CAPACITY	LENGTH(L)	WIDTH (W)	HEIGHT (H)	WEIGHT
GALLONS				
2X 250	7' 9"	4' 7"	7' 4"	3,600 lb.
2X 500	14' 1"	4' 7"	7' 4"	6,200 lb.

STANDARD EQUIPMENT:

- A-U/L 142 LISTED PRIMARY STORAGE TANK
W/CORROSION RESISTANT COATING
(ENTIRE TANK ASSEMBLY IS U/L 2085 LISTED
FIRE-RATED)
- B-110% SECONDARY CONTAINMENT W/LOCKING
ACCESS DOORS, VENT LOUVERS & PLEXIGLASS
VIEW PORT
- C-U/L LISTED AIR OPERATED 1" DOUBLE DIAPHRAGM
PUMP
- D-1/2" FULL COUPLING FOR AIR LINE CONNECTION
(AIRLINES REMOVED FOR CLARITY)
- E-3/4" PRODUCT DISCHARGE HOSE INTO TANK
- F-AUTOMATIC AIR OPERATED HIGH LEVEL
SHUTOFF VALVE W/WHISTLE
- G-U/L LISTED 3/4" X 8' HARDWALL SUCTION HOSE
W/INLINE STRAINER & MALE/FEMALE QUICK
CONNECT
- H-2" SUCTION TUBE W/KAMLOCK & DUSTCAP
FOR PRODUCT WITHDRAWAL
- I-2" PRIMARY WORKING VENT
- J-4" OR 6" PRIMARY EMERGENCY VENT
- K-PRODUCT LEVEL GAUGE
- L-SUPPORT FEET FOR ANCHORING & INSPECTION
- M-3 1/8" HOLE FOR VENT PIPE
- N-AIR OPERATED PISTON PUMP
- O-4" SPARE W/PVC PLUG
- P-2" FILL TUBE W/KAMLOCK & DUSTCAP
FOR PRODUCT FILL
- Q-STANDARD COATING: GRAY EPOXY

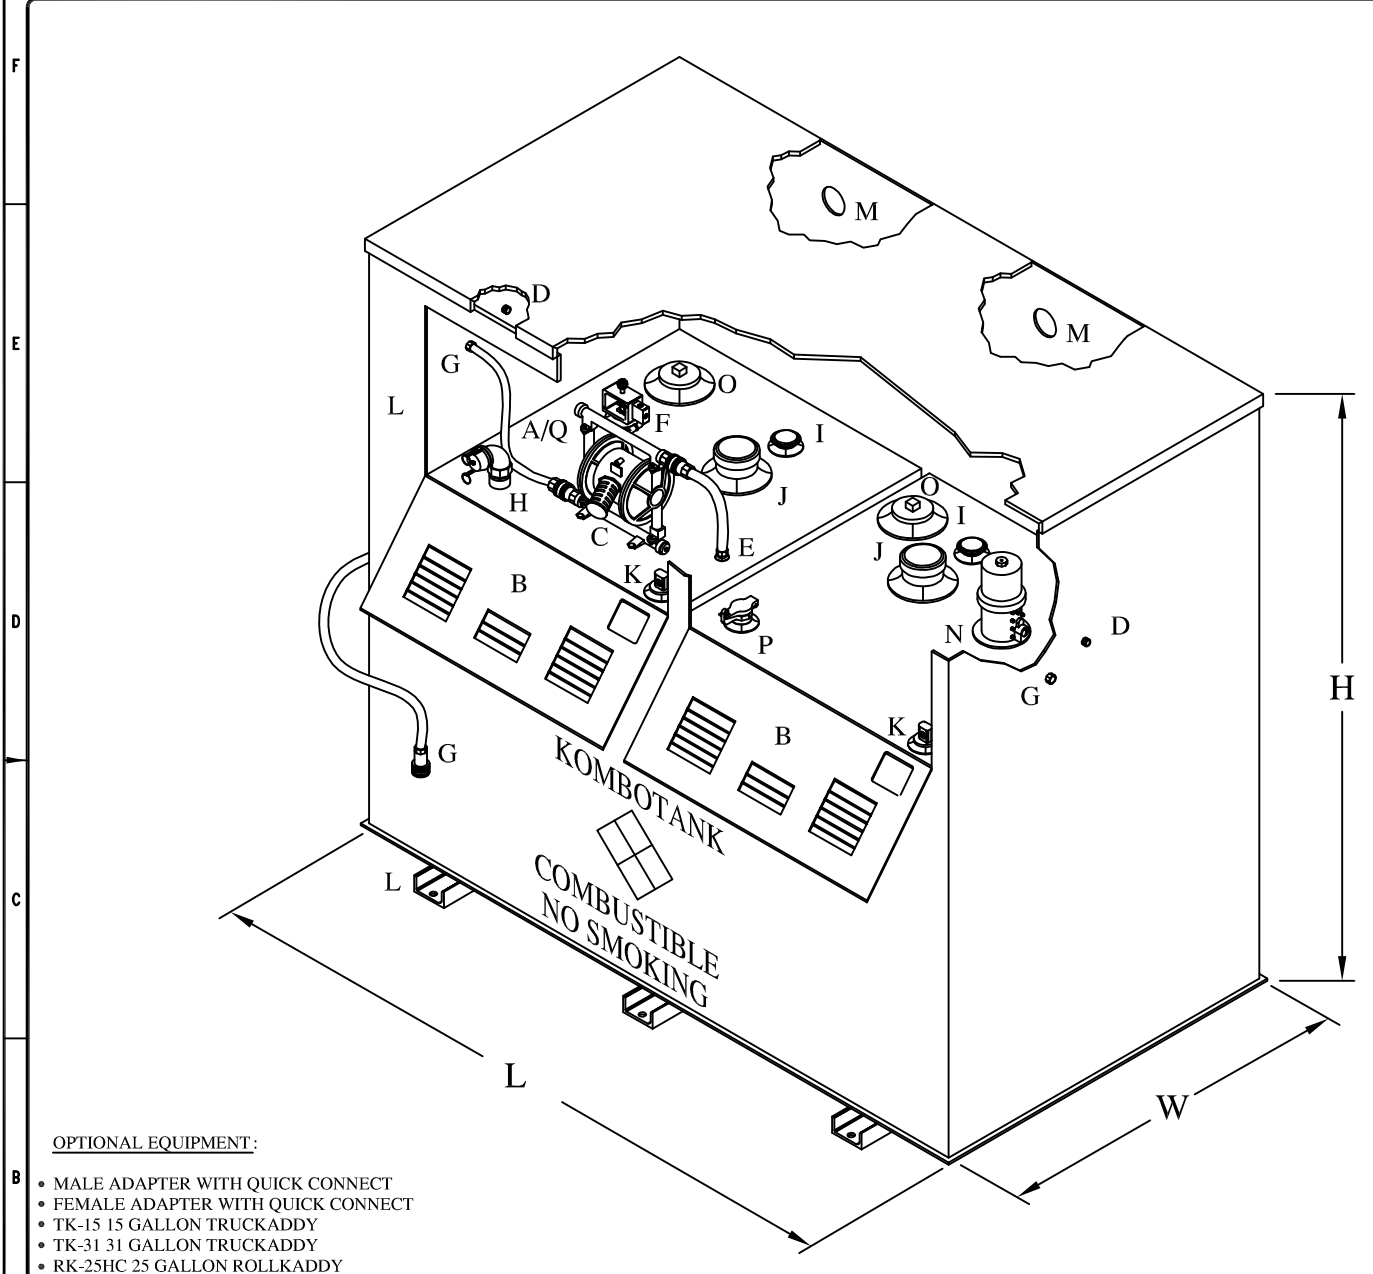

OPTIONAL EQUIPMENT:

- MALE ADAPTER WITH QUICK CONNECT
- FEMALE ADAPTER WITH QUICK CONNECT
- TK-15 15 GALLON TRUCKADDY
- TK-31 31 GALLON TRUCKADDY
- RK-25HC 25 GALLON ROLLKADDY

FIRE-RATED KOMBOTANK

AIRLINES REMOVED
FOR CLARITY

PRODUCT CODE	GALLONS	DESCRIPTION	OVERALL SIZE	SHIP WT.
SAC014	SEE CHART	UL-2085 FIRE RATED KOMBO TANK	SEE CHART	SEE CHART



THIS DRAWING AND DESIGN SHOWN HEREIN IS THE PROPERTY OF CONTAINMENT SOLUTIONS. USE OR COPIES THEREOF CANNOT BE MADE WITHOUT WRITTEN CONSENT.

CUSTOMER NAME _____

APPROVED BY: _____ DATE: _____

DRAWN BY: D. ROVANG		DATE DRAWN: 01-01-14	
DWG NUMBER: SAC014		SCALE:	
REV:	REV BY:	DATE:	SHEET: 1 OF 1