


# ONSITE SEPTIC SYSTEM

CSI manufactures Flowtite® fiberglass tanks for both aerobic and anaerobic septic applications. Our watertight tanks are a cost-effective, long-term solution for private homes, commercial developments, industrial and municipal applications. Government and state regulation of septic storage is changing to help reduce infiltration and exfiltration contamination. Flowtite® fiberglass septic tanks, also referred to as cisterns, eliminate leakage problems inherent in concrete septic systems. Our tanks are engineered to meet and exceed current requirements and standards. We offer IAPMO, UPC, and IPC approved tanks in various sizes up to 12' diameter including fiberglass baffles and other accessories.

Flowtite® water storage tanks contribute to satisfying multiple credits of the LEED® Green Building Rating System. CSI is a proud member of the U.S. Green Building Council and promotes proper fluid management and sustainable site development.

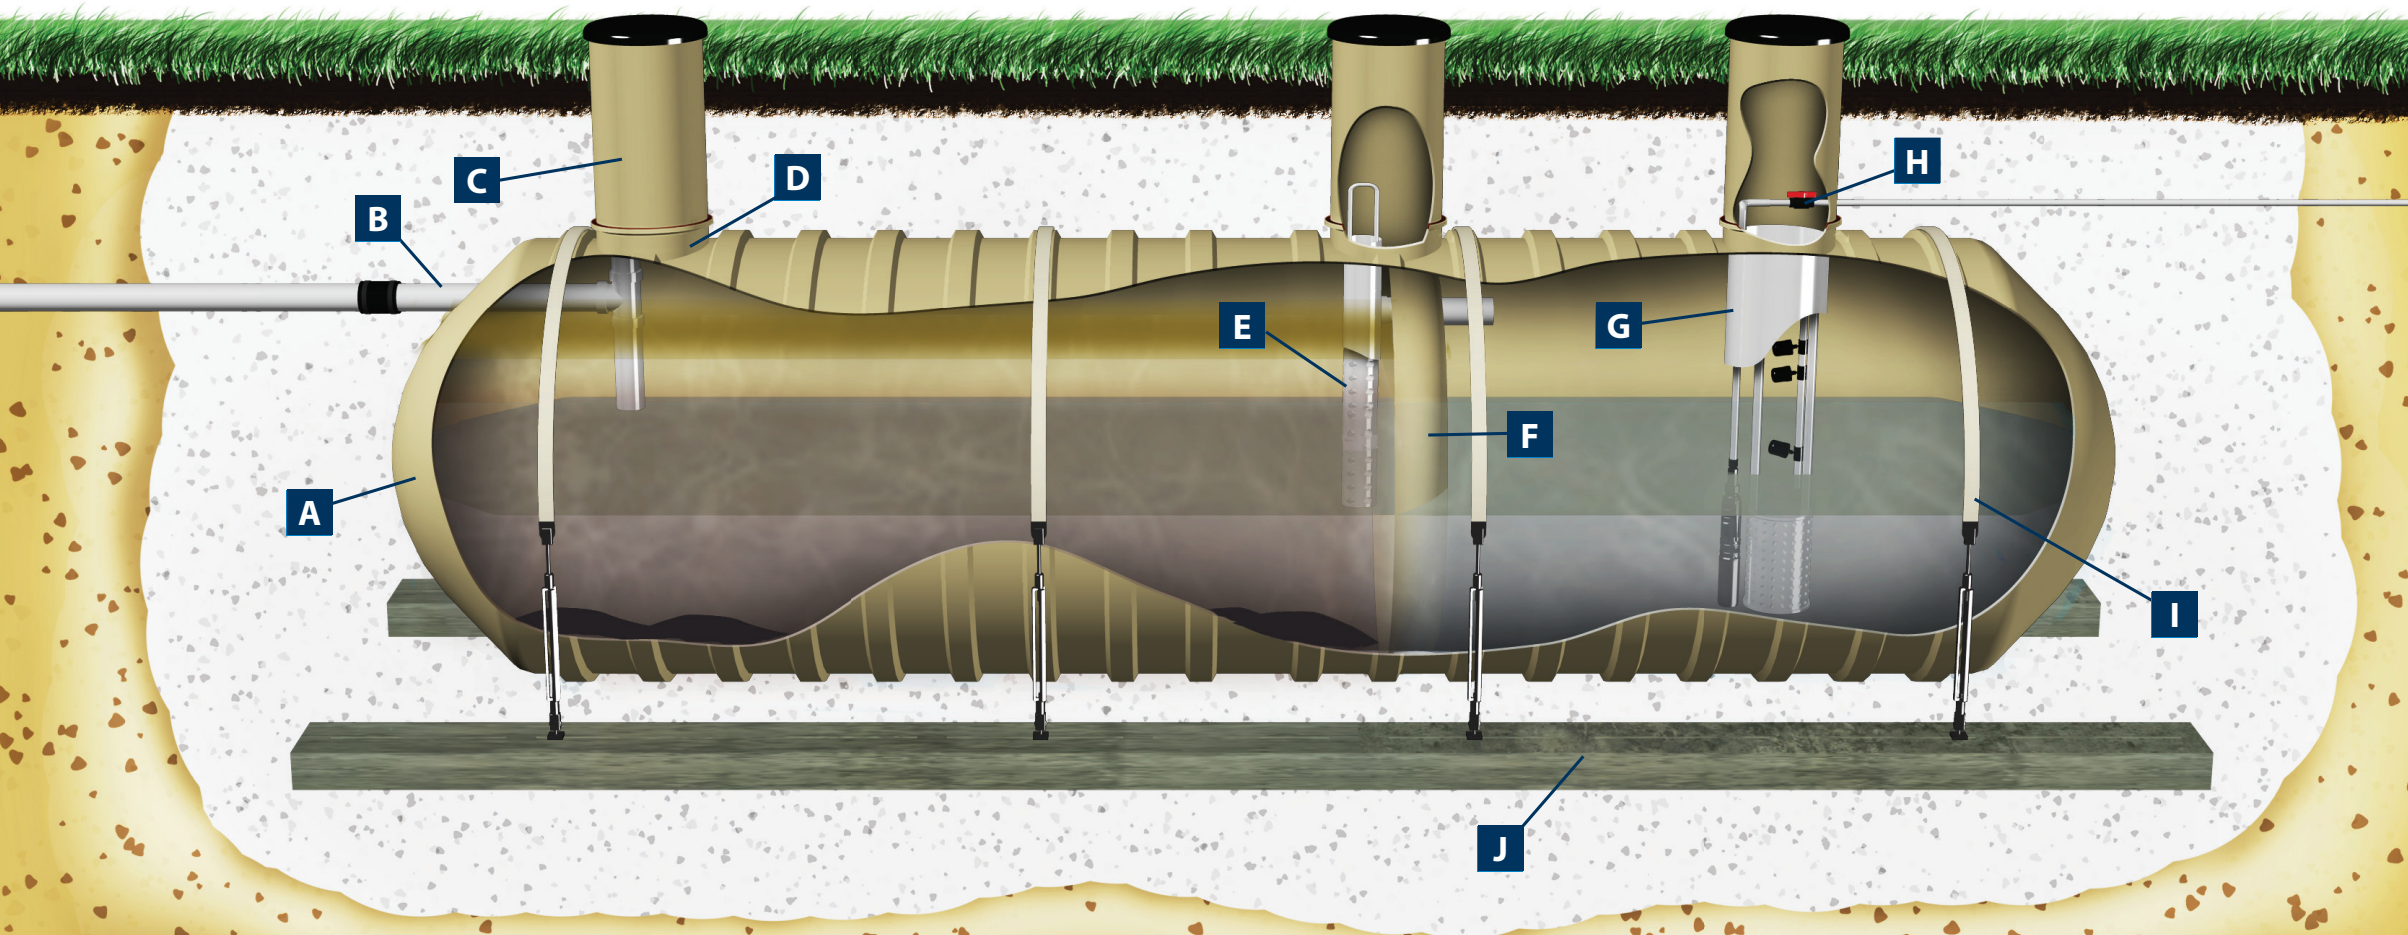

## Standard Features:

- A. Flowtite® Fiberglass Tank (600 - 60,000 gallons)
- B. PVC Inlet Piping
- C. Watertight Fiberglass Riser
- D. Fiberglass Access Opening Watertight Adhesive Channel (24", 30", 36", 48")
- E. Effluent Filter
- F. Fiberglass Baffle

## Typical Accessories:

- G. Effluent Pump with Filter
- H. Effluent Discharge
- I. Fiberglass Anchor Straps
- J. Deadmen Anchors

INTERNATIONAL  
Plumbing  
Code



333 North Rivershire Drive • Suite 190 • Conroe, TX 77304 • Phone: (936) 756-7731 • www.containmentsolutions.com  
Copyright © • Containment Solutions, Inc. • All Rights Reserved • March 2017 • Pub. No. TNK 1081C  
LEED® is a registered trademark of the U.S. Green Building Council, and is not affiliated with Containment Solutions, Inc.



CONTAINMENT  
SOLUTIONS®



# TYPICAL ONSITE SEPTIC SYSTEM



**CONTAINMENT**  
SOLUTIONS®