

# FLOWTITE PRODUCTS

## GREASE INTERCEPTOR



NOTE: CUSTOMER SUPPLIED  
"ASTM C-1644" APPROVED  
FLEXIBLE PIPING COUPLING  
REQUIRED ON TANGENTIALLY  
MTD. NOZZLES, & PIPES

SHELL CODES: 2-E6S0661



THIS IS AN IAPMO APPROVED TANK  
THE ONLY CHANGE ALLOWED TO  
THIS TANK IS TO INCREASE THE  
INLET AND OUTLET PIPE DIAMETER.  
MFG. PER. PE-C22.85

CAPACITIES:  
LIQUID OPERATING CAPACITY = 3430 GALS  
FREE SURFACE AREA OF LIQUID = 82 SQ/FT  
GREASE/FOG STORAGE = 1704 GALS/12950 LBS

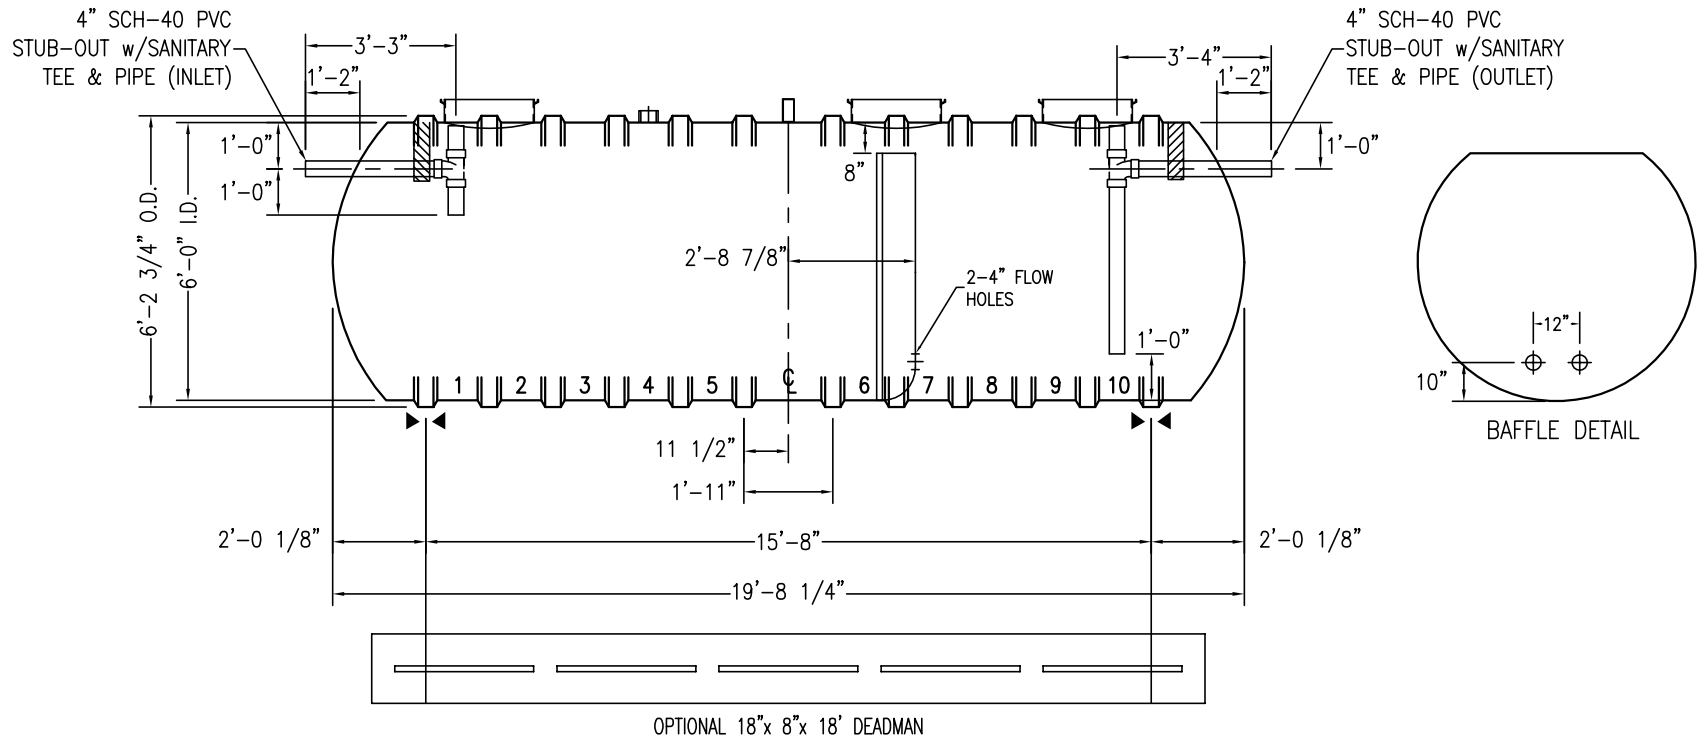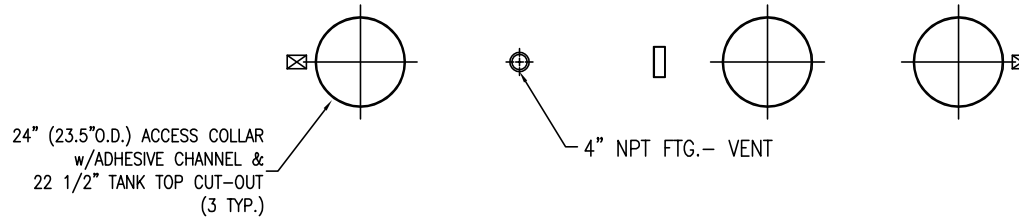

### NOTES:

- ☒ HOLD DOWN STRAP CLIP
- ▶◀ HOLD DOWN STRAP LOCATION
- TYPE "13" LIFT LUG - SD
- TYPE "13" LIFT LUG - HD

SWT D6 (6') 3400 2B-IG		DATE: 1/1/2014
IAPMO GREASE INTERCEPTOR		DRAWN BY: R.MOEN
<b>CONTAINMENT SOLUTIONS</b>	CAPACITY: 3,958	REVISED:
	WEIGHT: DRY/WET 1800	DWG NUMBER: 634CSW-IG