



Lube Cube® lube oil tanks are the best solution for storage of new and used lubrication oils. Lube Cubes provide lower installed costs than underground tanks, better space utilization than cylindrical aboveground tanks and lower operation costs than 55-gallon drums.

Lube Cube Tanks are designed for easy and convenient installation either indoors, in service bays or basements, or outdoors, next to the building. Lube Cube's rectangular shape allows for the storage of up to 20% more volume in a given space than comparable cylindrical tank capacities.

Lube Cubes are available as either single or double-wall tanks. Double-wall tanks are UL listed as integral secondary containment and therefore do not require dikes for leak containment.

Desert sand primer finish is standard. Special colors, coatings and interior linings, custom dimensions and equipment packages are available upon request.

### STANDARD FEATURES:

- UL-142 listed
- Meets NFPA 30 Standard
- Skid mounted for easy installation
- Shop primed exterior
- Moveable by forklift
- NPT fittings with PVC plugs  
Single-Wall: 5 (plus emergency vent opening)  
Double-Wall: above fittings (plus emergency vent and inspection opening)
- Lifting lugs

### OPTIONS:


- Corrosion resistant exterior coating
- 7 gallon spill box
- Custom sizes
- Compartments available
- Stainless-steel construction
- Interior coatings
- Equipment packages



*Lube Cube tanks are available in standard sizes from 60 to 20,000 gallons.*

## STANDARD TANK SIZES:

CAPACITY (GALLONS)	DIMENSIONS (L x W x H)	WEIGHT (LBS)	CAPACITY (GALLONS)	DIMENSIONS (L x W x H)	WEIGHT (LBS)
60	1'11" x 2'10" x 3'1"	385	480	5'8" x 3'10" x 4'1"	1,350
90	2'6" x 2'10" x 3'1"	460	500	4'10" x 3'10" x 5'1"	1,425
120	3'2" x 2'10" x 3'1"	485	550	5'2" x 3'10" x 5'1"	1,450
150	3'9" x 2'10" x 3'1"	675	600	5'7" x 3'10" x 5'1"	1,475
150	2'10" x 2'10" x 4'1"	650	650	6'3" x 3'10" x 5'1"	1,525
180	3'4" x 2'10" x 4'1"	700	750	6'9" x 4'0" x 5'1"	1,625
200	3'7" x 2'10" x 4'1"	740	1,000	9'4" x 4'0" x 5'1"	2,400
210	3'9" x 2'10" x 4'1"	765	1,500	13'4" x 4'0" x 5'1"	3,250
225	3'11" x 2'10" x 4'1"	790	2,000	13'9" x 5'0" x 5'1"	3,800
240	4'2" x 2'10" x 4'1"	830	2,500	17'0" x 5'0" x 5'1"	4,500
250	4'4" x 2'10" x 4'1"	860	3,000	20'5" x 5'0" x 5'1"	6,650
275	4'8" x 2'10" x 4'1"	900	4,000	22'3" x 5'0" x 6'1"	8,150
280	4'10" x 2'10" x 4'1"	850	5,000	17'1" x 8'0" x 6'1"	10,150
300	3'10" x 3'10" x 4'1"	925	6,000	20'3" x 8'0" x 6'1"	11,400
325	4'1" x 3'10" x 4'1"	975	8,000	19'11" x 8'0" x 8'1"	14,000
350	4'4" x 3'10" x 4'1"	1,000	10,000	24'7" x 8'0" x 8'1"	16,125
375	4'7" x 3'10" x 4'1"	1,050	12,000	29'3" x 8'0" x 8'1"	18,550
400	4'10" x 3'10" x 4'1"	1,100	15,000	36'3" x 8'0" x 8'1"	22,100
450	5'5" x 3'10" x 4'1"	1,200	20,000	48'2" x 8'0" x 8'1"	28,900

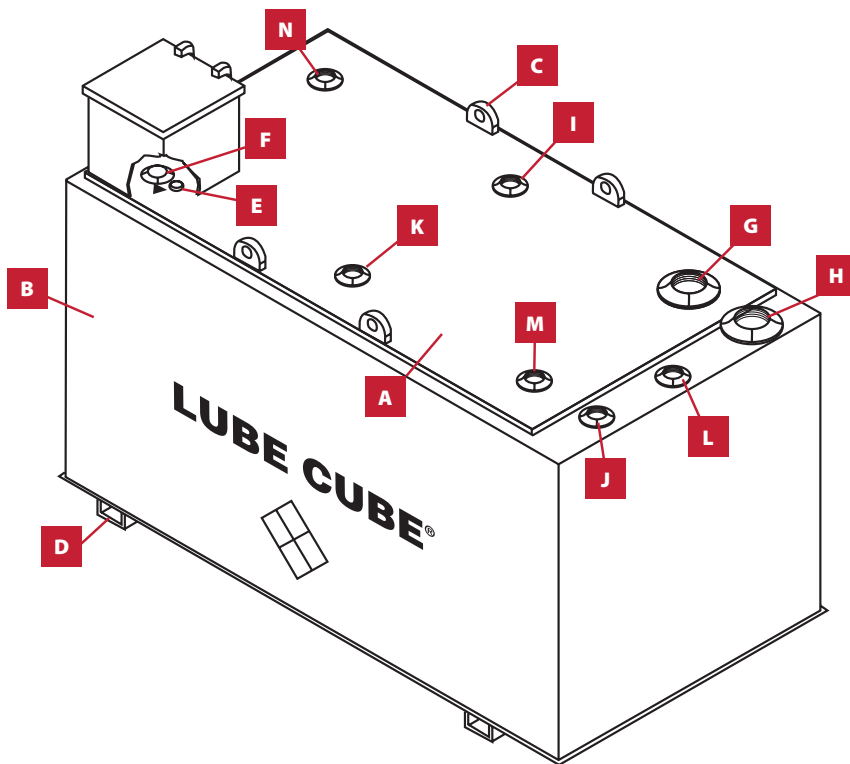

### Standard Equipment

- A. Primary Tank
- B. Secondary Tank  
*with Corrosion Resistant Desert Sand Primer Exterior Coating*
- C. Lifting Lugs  
(2) 60 - 650 Gallon  
(4) 1,000 - 20,000 Gallon
- D. Support Feet
- E. 1/2" NPT Drain with Optional Spill Box
- F. Fill - 2", 4" or 6"
- G. Primary Tank Emergency Vent  
4", 6", 8", or 10"
- H. Secondary Containment  
Emergency Vent 4", 6", 8" or 10"
- I. 2" Primary Working Vent
- J. 2" Secondary Containment  
Working Vent
- K. 2" Gauge
- L. 2" Monitoring Point
- M. 2" Spare
- N. 2" or 4" Spare



**CONTAINMENT  
SOLUTIONS®**

333 North Rivershire Drive, Suite 190 • Conroe, TX 77304 • Phone: (936) 756-7731 • www.containmentsolutions.com  
Copyright © • Containment Solutions, Inc. • All Rights Reserved • July 2017 • Pub. No. LC 3500G

