

**FLOWTITE PRODUCTS**

GREASE INTERCEPTOR

NOTE: CUSTOMER SUPPLIED  
"ASTM C-1644" APPROVED  
FLEXIBLE PIPING COUPLING  
REQUIRED ON TANGENTIALLY  
MTD. NOZZLES, & PIPES

SHELL CODES: 2-EXS11SD, 1-OXS10SD





THIS IS AN IAPMO APPROVED TANK  
COMPLIANCE STANDARDS AND CODES:  
IAPMO/ANSI Z1001  
UNIFORM PLUMBING CODE (UPC)  
INTERNATIONAL PLUMBING CODE (IPC)  
MFG. PER PE-C22.85

**CAPACITIES:**

LIQUID OPERATING CAPACITY = 21750 GALS  
FREE SURFACE AREA OF LIQUID = 484 SQ/FT  
GREASE/FOG STORAGE = 11806 GALS/89726 LBS

24" (23.5"O.D.) ACCESS COLLAR  
w/ADHESIVE CHANNEL &  
22 1/2" TANK TOP CUT-OUT  
(3 TYP.)

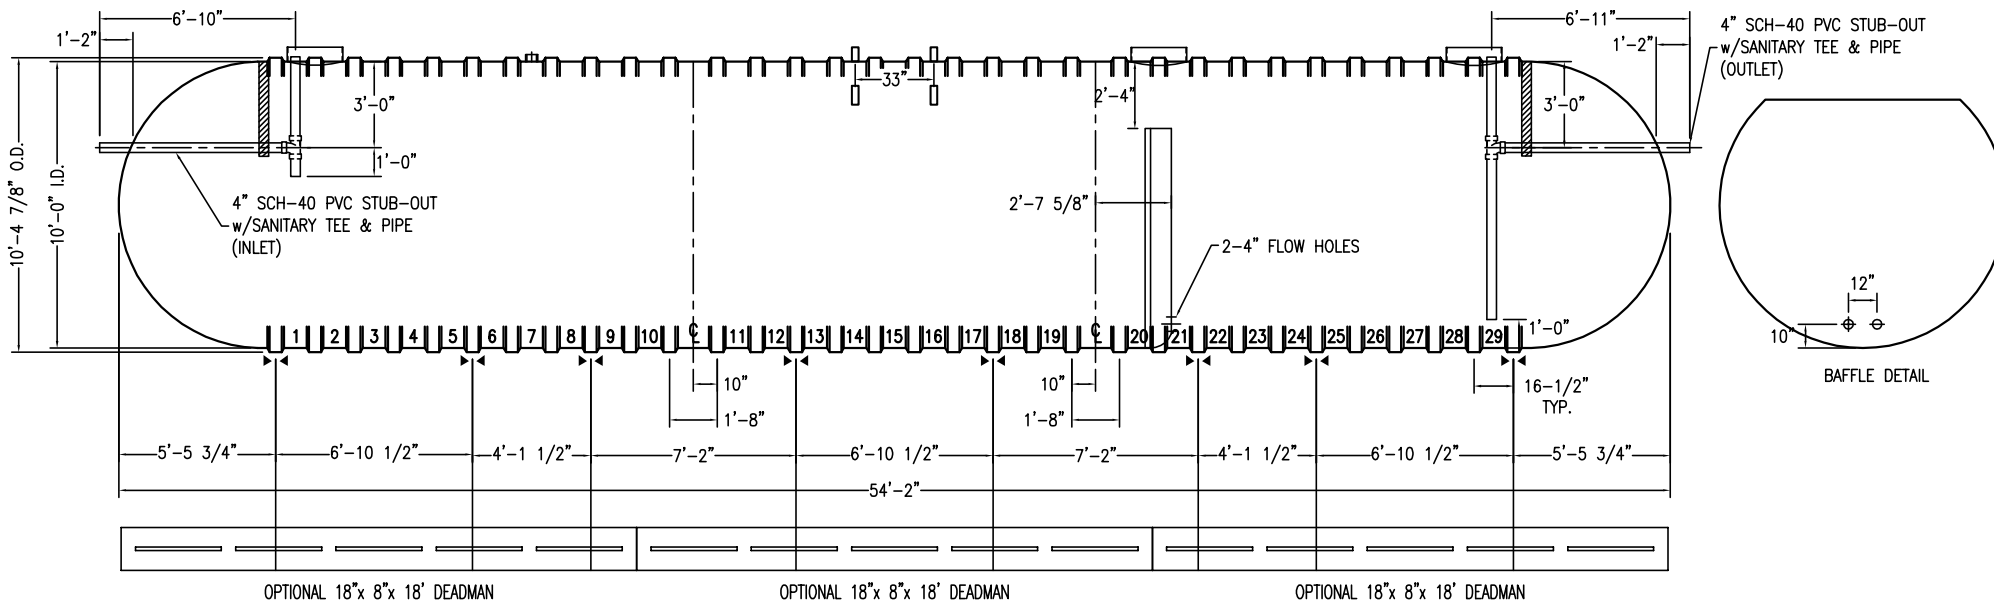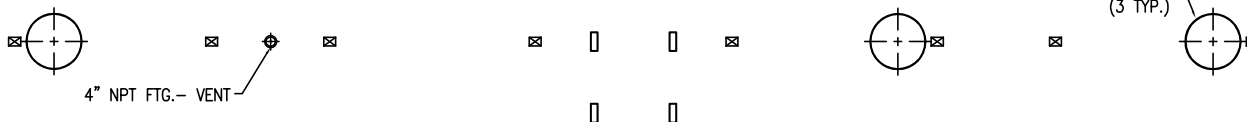

**NOTES:**

- ☒ HOLD DOWN STRAP CLIP
- ▶◀ HOLD DOWN STRAP LOCATION
- TYPE "13" LIFT LUG - SD
- TYPE "13" LIFT LUG - HD

SWT D6 (10') 21800 2B-IG		DATE: 1/1/2014
IAPMO GREASE INTERCEPTOR		DRAWN BY: R.MOEN
<b>CONTAINMENT SOLUTIONS</b>	CAPACITY: 29,816	REVISED: 02/01/17-A
	WEIGHT: DRY/WET 9000	DWG NUMBER: 1022MSW-IG