

# FLOWTITE PRODUCTS

## GREASE INTERCEPTOR

NOTE: CUSTOMER SUPPLIED  
"ASTM C-1644" APPROVED  
FLEXIBLE PIPING COUPLING  
REQUIRED ON TANGENTIALLY  
MTD. NOZZLES, & PIPES


SHELL CODES: 1-E6S06SD, 1-E6SECSO



THIS IS AN IAPMO APPROVED TANK  
THE ONLY CHANGE ALLOWED TO  
THIS TANK IS TO INCREASE THE  
INLET AND OUTLET PIPE DIAMETER.  
MFG. PER. PE-C22.85

### CAPACITIES:

LIQUID OPERATING CAPACITY = 1866 GALS  
FREE SURFACE AREA OF LIQUID = 42 SQ/FT  
GREASE/FOG STORAGE = 723 GALS/5495 LBS

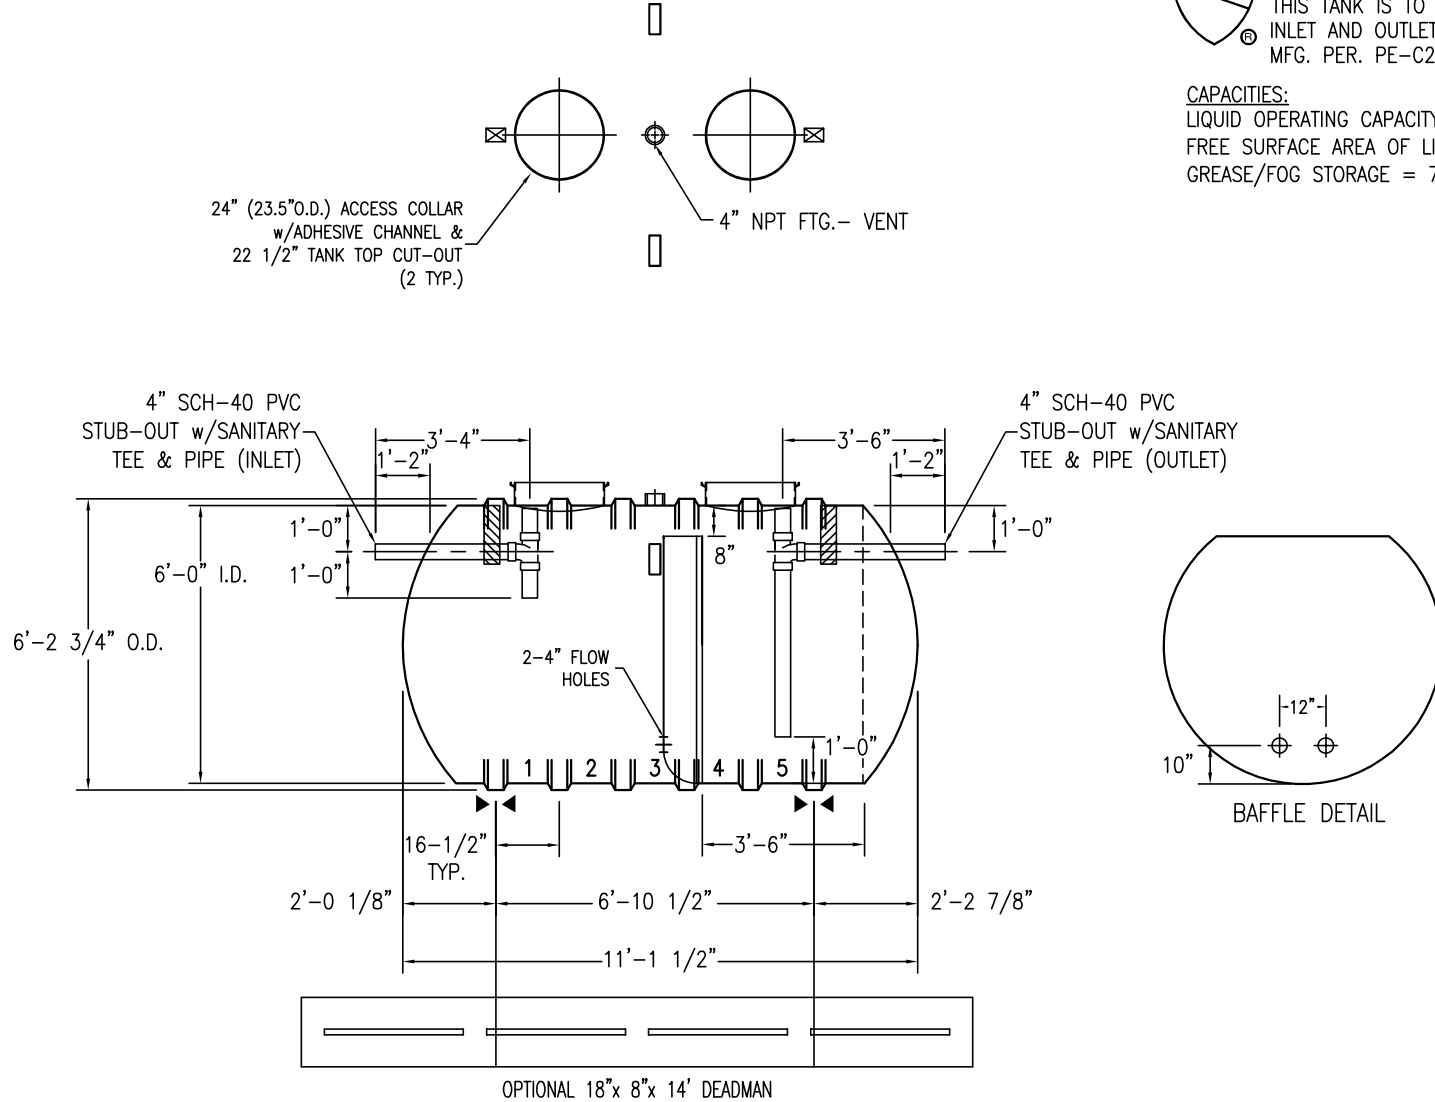

### NOTES:

- ☒ HOLD DOWN STRAP CLIP
- ▶◀ HOLD DOWN STRAP LOCATION
- TYPE "13" LIFT LUG - SD
- TYPE "13" LIFT LUG - HD

SWT D6 (6') 1900 2B-IG		DATE:	1/1/2014
IAPMO GREASE INTERCEPTOR		DRAWN BY:	R.MOEN
<b>CONTAINMENT SOLUTIONS</b>	CAPACITY:	2,147	
	WEIGHT: DRY/WET	1200	
		REVISED:	
		DWG NUMBER:	619CSW-IG