


FIRE PROTECTION SYSTEM

Watertight Flowtite® tanks, from Containment Solutions, can be custom built for any fire protection system. We understand the requirements of fire protection systems, and manufacture our tanks to National Fire Protection Association (NFPA) standards.

By providing a dedicated source of water required by local codes in residential development, CSI fiberglass tanks are a preferred way to have access to large volumes of water. The tank provides unseen protection for the residents, yet are easily accessible for fire and municipal vehicles. Flowtite tanks are also used for commercial fire protection due to the inherent water tight properties of fiberglass and the large volume capacities.

Flowtite water storage tanks contribute to satisfying multiple credits of the LEED® Green Building Rating System. CSI is a proud member of the U.S. Green Building Council and the American Fire Sprinkler Association and promotes proper fluid management and sustainable site development.

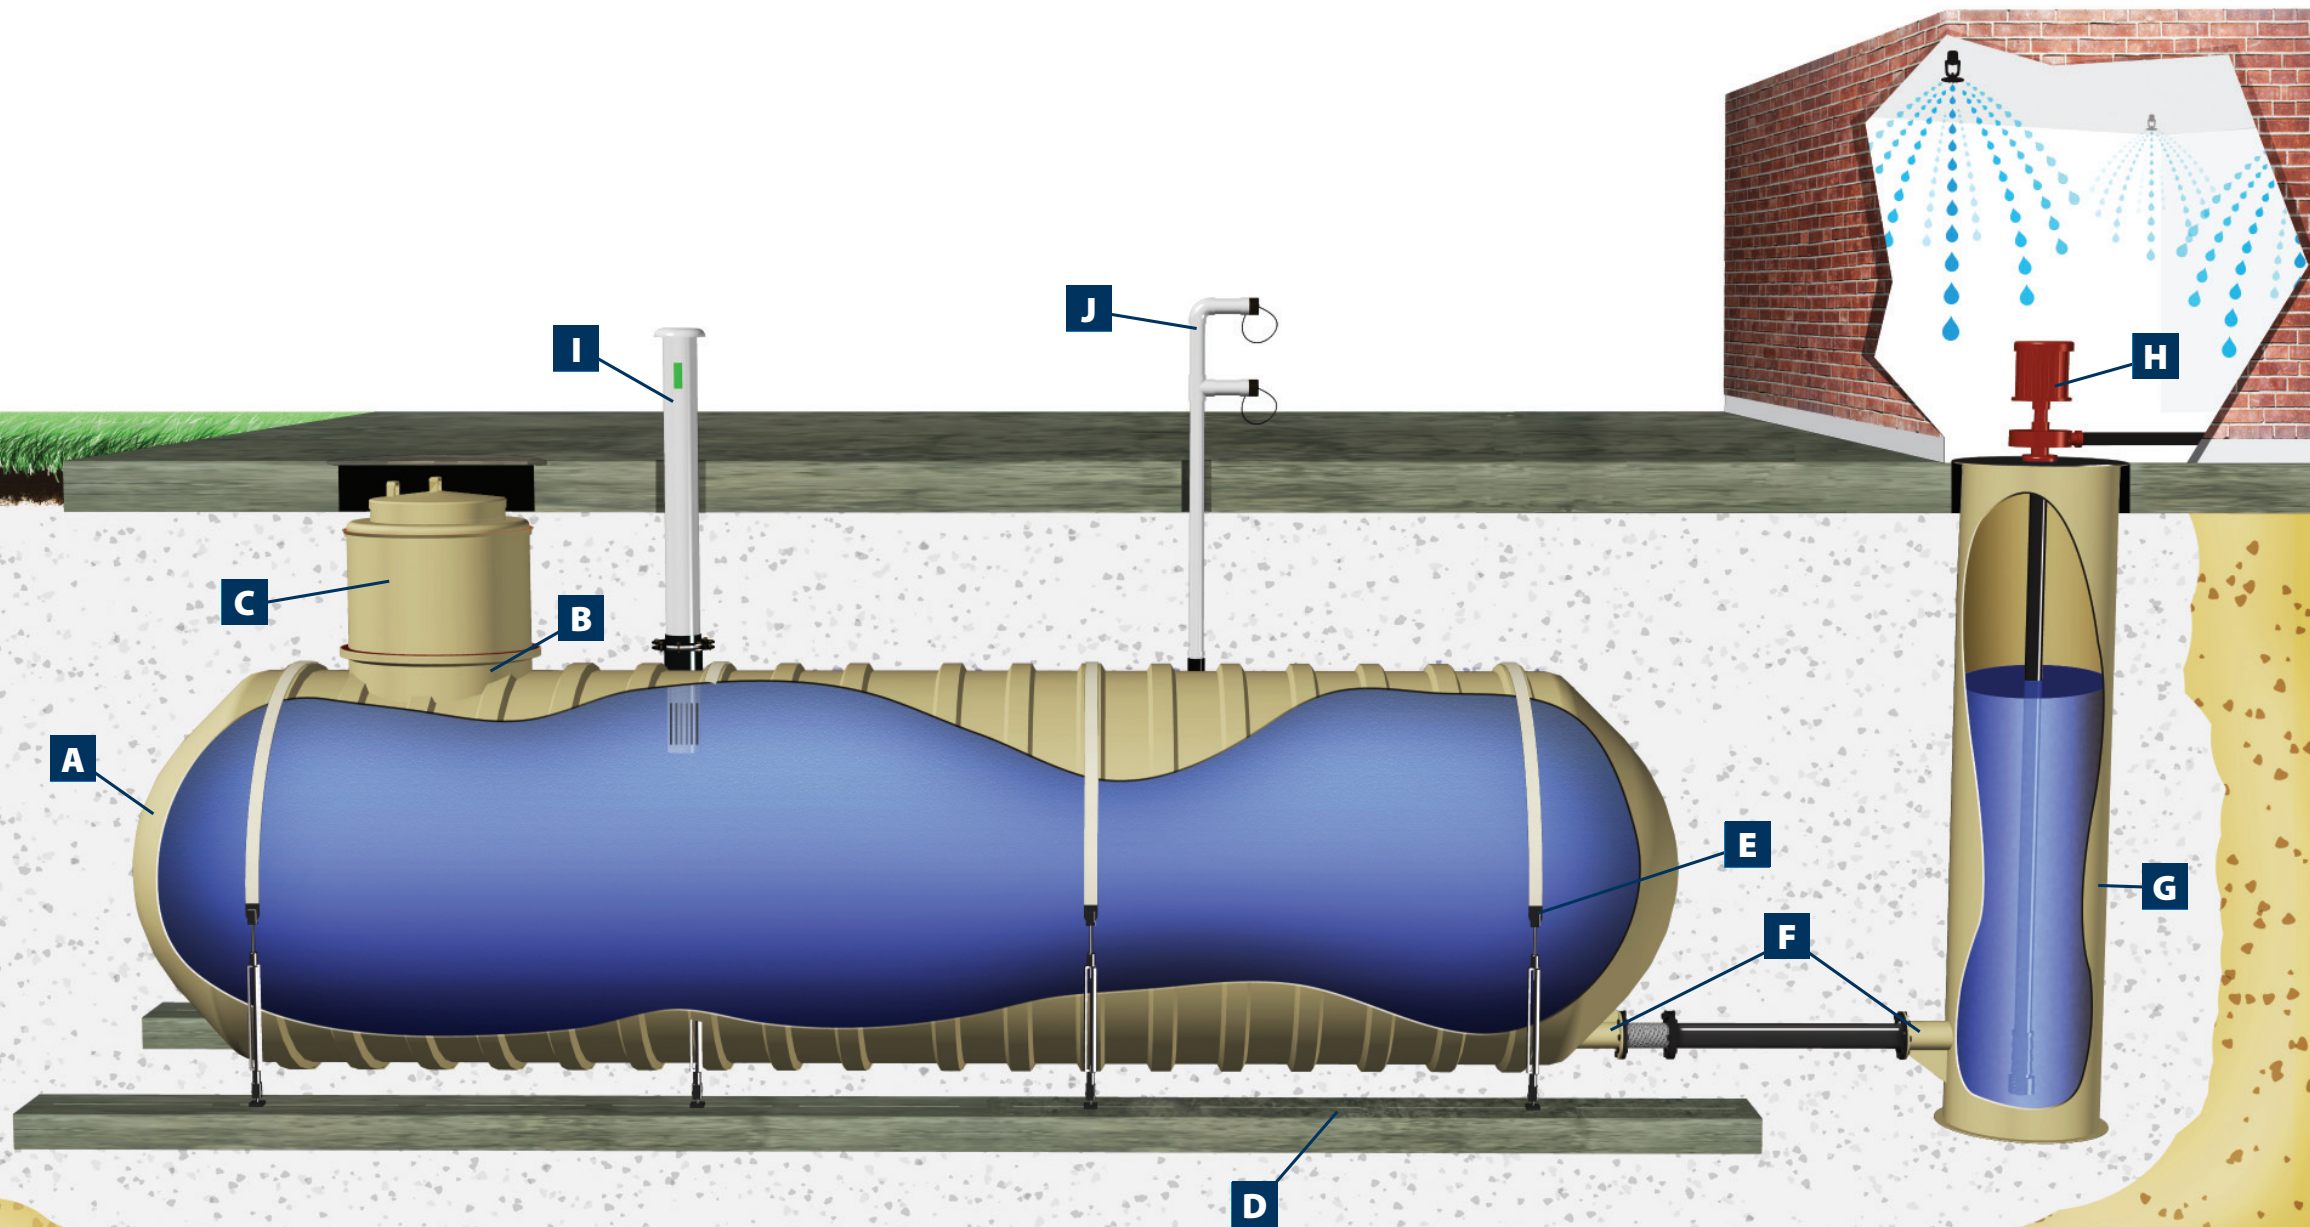

Standard Features:

- A.** Flowtite® Fiberglass Tank (600 - 60,000 gallons)
- B.** Fiberglass Access Collar (24", 30", 36", 48")
- C.** Watertight Fiberglass Riser
- D.** Deadmen Anchors
- E.** Fiberglass Anchor Straps
- F.** Flanged Nozzles
- G.** Vertical Pump Vault

Typical Accessories:


- H.** Vertical Turbine Pump with Discharge Head
- I.** Vent/Level Indicator
- J.** Dual NST Fill Point



CONTAINMENT
SOLUTIONS®

333 North Rivershire Drive • Suite 190 • Conroe, TX 77304 • Phone: (936) 756-7731 • www.containmentsolutions.com
Copyright © Containment Solutions, Inc. All Rights Reserved • November 2015 • Pub. No. TNK 1084B
LEED® is a registered trademark of the U.S. Green Building Council, and is not affiliated with Containment Solutions, Inc.





TYPICAL FIRE PROTECTION SYSTEM



CONTAINMENT
SOLUTIONS®