





HYDROGUARD® SINGLE-SUMP SYSTEM

The HydroGuard® Single-Sump System combines the proven technology of a hydrostatically monitored double-wall tank with the advanced protection of a hydrostatically monitored double-wall tank sump. Continuous monitoring 24 hours a day, 7 days a week.

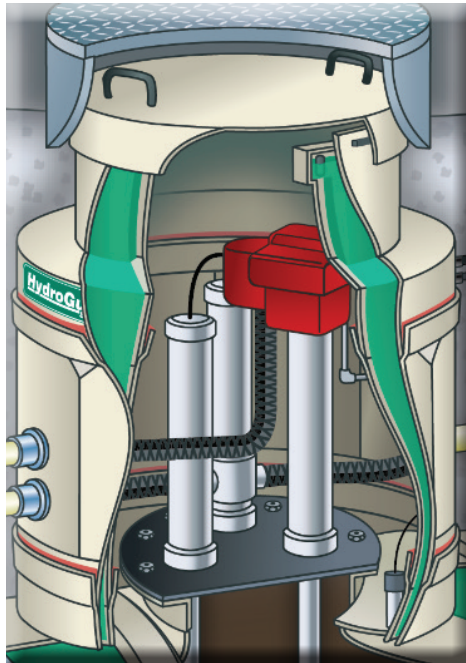

**Hydrostatically Monitored
Double-Wall Fiberglass Tank Sump**

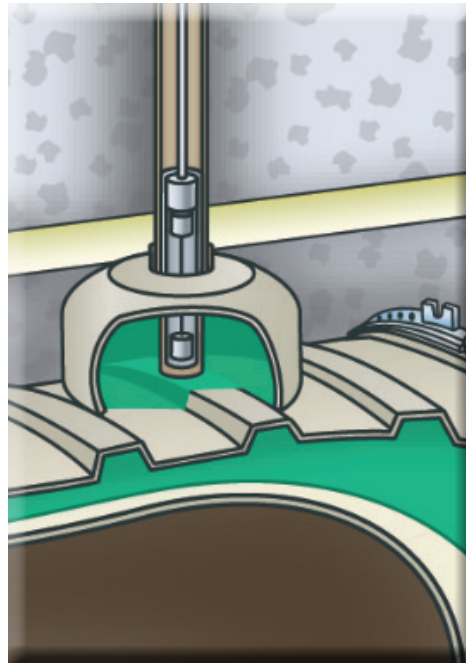

**Hydrostatically Monitored
Double-Wall Fiberglass Tank**

Features / Benefits


- Hydrostatically Monitored Double-Wall Tank Sump
- Eliminates the Federal Regulation Requirement to Test Sumps Every 3 Years
- Watertight Sump Lid
- Hydrostatically Monitored Double-Wall Tank
- Continuous Monitoring 24/7
- Fiberglass Tank Top Couplings
- Corrosion Free UST Solution
- Enhanced HydroGuard® Limited Warranty

The Safety and Security that Comes with Our HydroGuard® Multi-Sump System is Now Available in a Single-Sump System. Visit containmentsolutions.com for more information.



Because What's Inside Matters!™

Containment Solutions, Inc. • Copyright © • February 2019 • All Rights Reserved • Pub. No. TNK 1109B

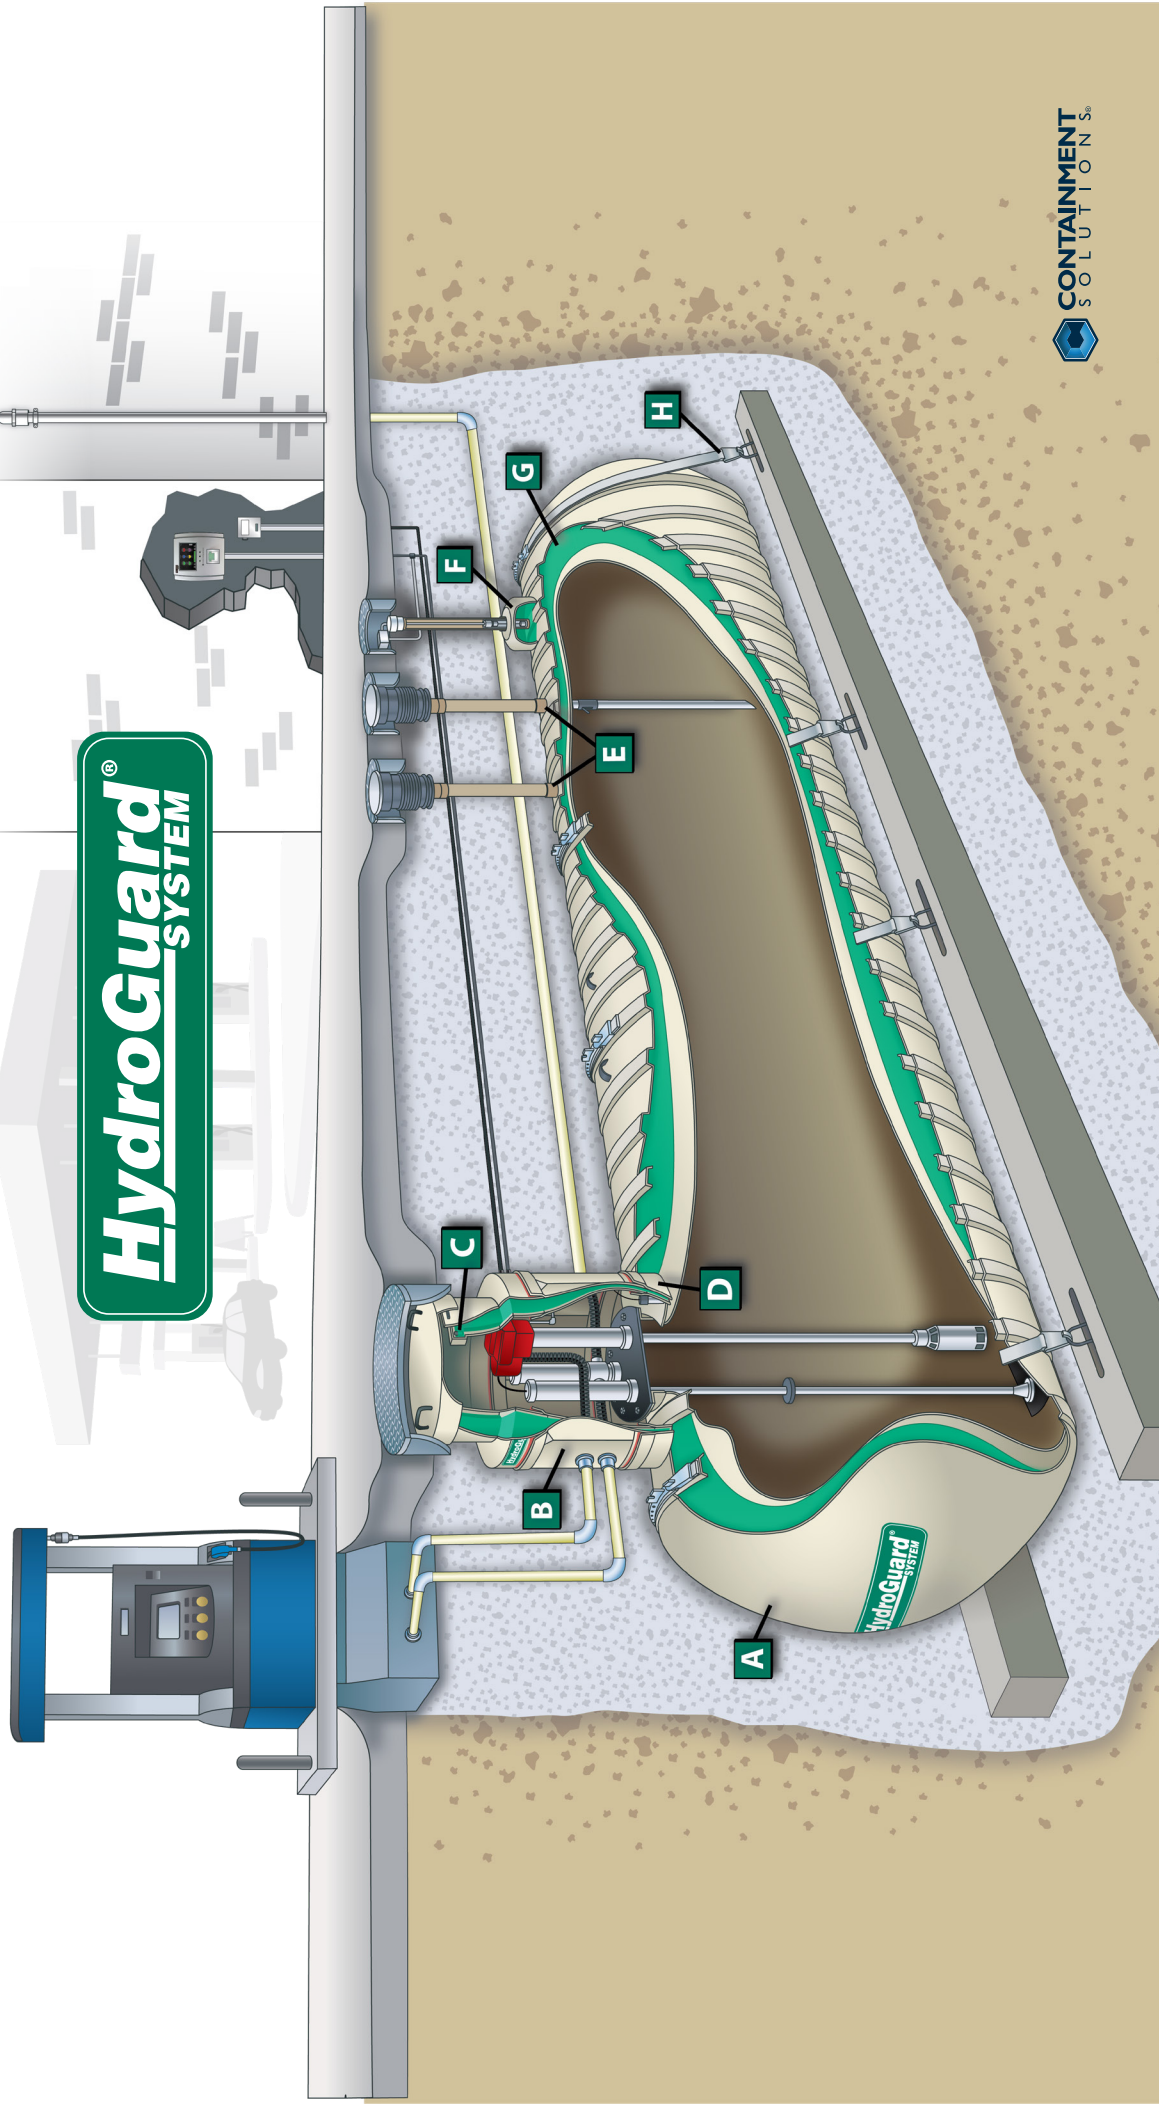

SINGLE-SUMP SYSTEM STANDARD FEATURES:

- A. Double-Wall Tank
- B. Double-Wall Tank Sump
- C. Hydrostatic Sump Reservoir
- D. Double-Wall Containment Collar
- E. Fiberglass Couplings
- F. Hydrostatic Tank Reservoir
- G. Monitoring Fluid
- H. Anchoring System